


Bunford Heights Guided Auger Bore Works

OnSite Pipeline Services

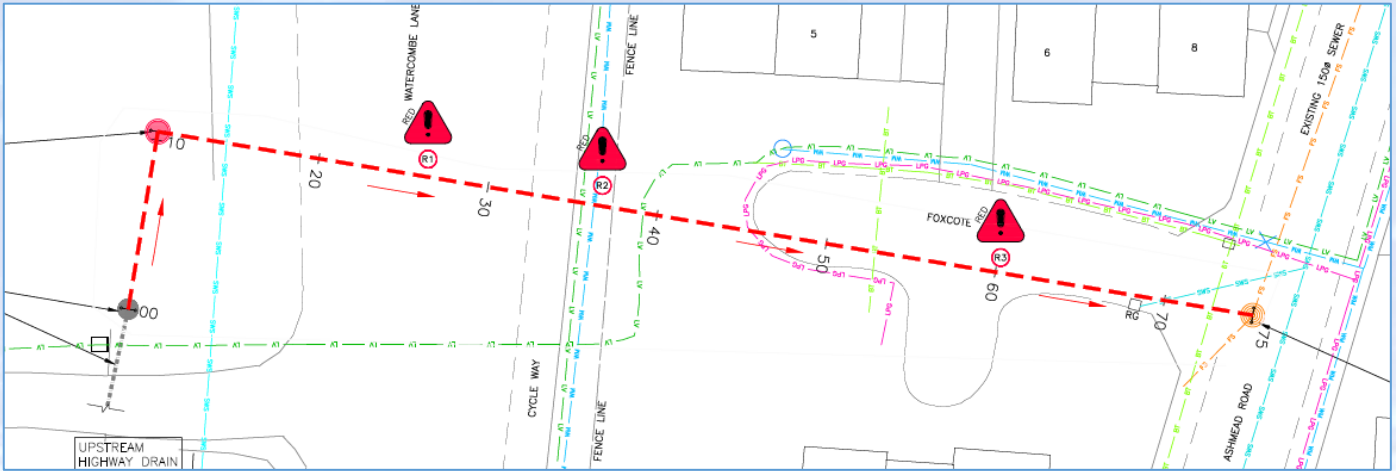

OnSite has successfully installed another new sewer following the completion of a recent housing development in Yeovil.

OnSite (in partnership with Active Tunnelling) was able to deliver a solution combining open cut and guided auger installation of 70m, of 225mm diameter clay jacking pipe.

This challenging bore with minimal falls (700mm over 70m with a variety of services to contend with), required an accurate setup and clinical auger operation. To add to the complexity, the bore needed to navigate a major A-road and join into the existing sewer network, the downstream manhole being located in a residential cul-de-sac with a shallow 1.7m depth. All of this, combined with onerous prerequisites, including the new sewer having to fit existing levels of the upstream and downstream sewer systems, meant there was no room for error.

The project was delivered on programme and with minimal disruption to the highway and local residents. OnSite received a number of written compliments from both the residents and the client on their professionalism, politeness and high quality of the works.



- Delivered on time*
- Delivered on budget*
- High quality solution*
- Professional and polite*

ID:005607	AUDITED	QUALIFIED			